TECHNICAL DATA

Three Phase Electric Motors-Aluminum Frame – PM1A112M4

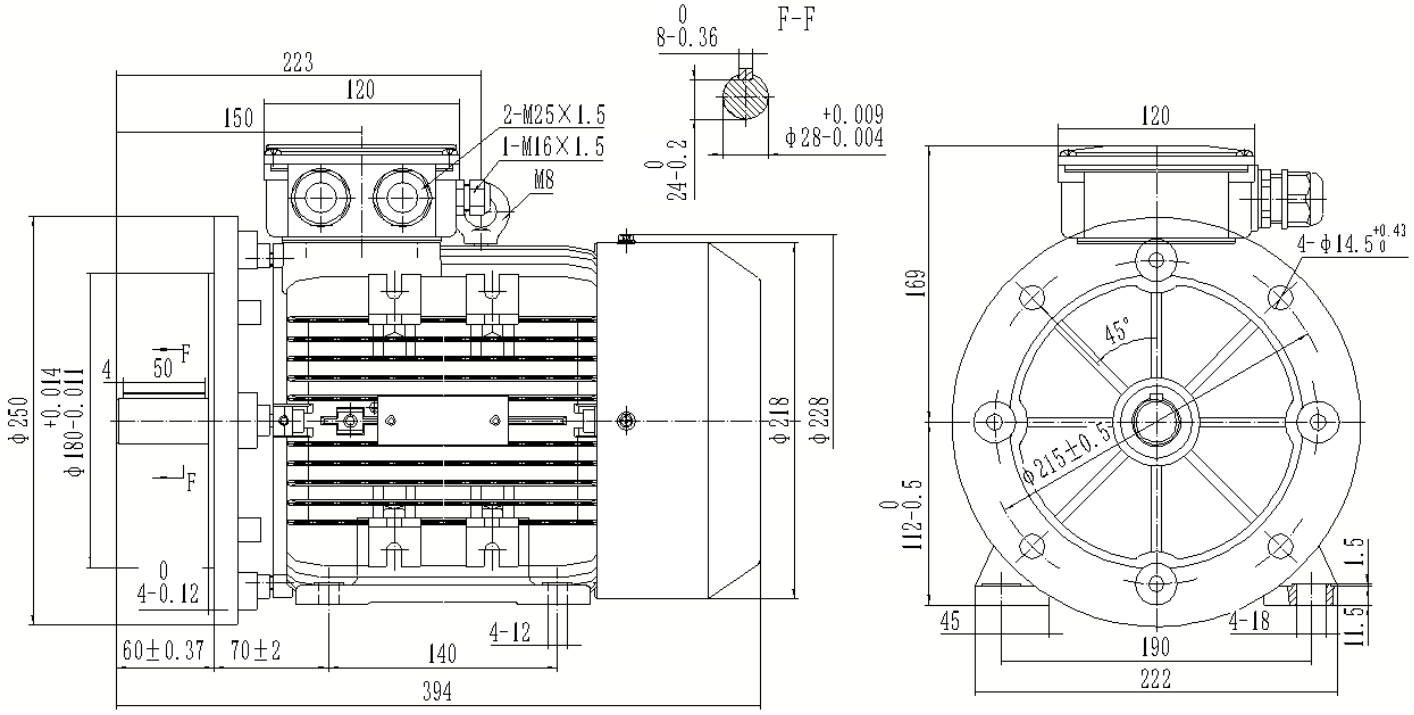

Type	**PM1A112M4 PTC**
Frame Size	**112**
Capacity	**4 kW**
Speed / Pole	**1430 RPM / 4 Pole**
Mounting Position	**IMB35**
Insulation Class	**F**
Protection Class	**IP55**
Duty Cycle	**S1 Continuous**
Temperature Rise Class	**B**
Ambient temp. (˚C)	**45˚C**
Cooling method	**IC411 self-Ventilated**

Efficiency	**IE1 Efficiency**
Power Factor COS (phi)	**82%**
I-starting / I-nominal	**7.0**
T-starting / T-nominal	**2.2**
T-max/Tn	**2.4**
Full Load Torque	**27Nm**
Thermal protection	**PTC thermistor**
Noise	**65dB**
Bearing DE	**SKF 6306 C3**
Bearing NDE	**SKF 6306 C3**
Weight (kg)	**34**

Electrical data:

Rated Power (kW)	4		3.9		4.8		4.7
Frequency (Hz)	50		50		60		60
Voltage (V)	400	690	380	660	480	830	440
Speed (RPM)	1430	1430	1430	1430	1710	1710	1710
Connection	Δ	Y	Δ	Y	Δ	Y	Δ
Full load current (A)	8.6	5	9.1	5.24	8.6	5	9.1

Python Electric Motors Sp.z.o.o., Aleja, Pawla II 27, 00-867, Warsaw, Poland
Web: www.pythonelectricmotors.com, E-mail: info@pythonelectricmotors.com